
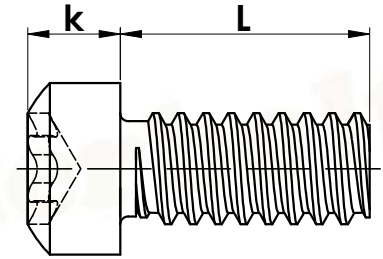



# ASME B18.6.3-Hexalobular recess Fillister head screw



Nom. dia.	Head diameter (D <sub>k</sub> ) (max.)	Head height (k) (max.)	Recess (A)	Penetration gauging depth (t) (min.)
# 10-32	0.313	0.180	T25	0.070
# 8-32	0.270	0.156	T20	0.055
# 6-32	0.226	0.132	T15	0.045
# 5-40	0.205	0.120	T10	0.045
# 4-40	0.183	0.107	T10	0.030
# 3-48	0.161	0.095	T8	0.035
# 2-56	0.140	0.083	T6	0.025
# 1-64	For more information, please contact our sales staff			
# 0-80				
# 00-90				

Unit: inch