


ASME B18.6.3-Hexlobular socket Truss head screw

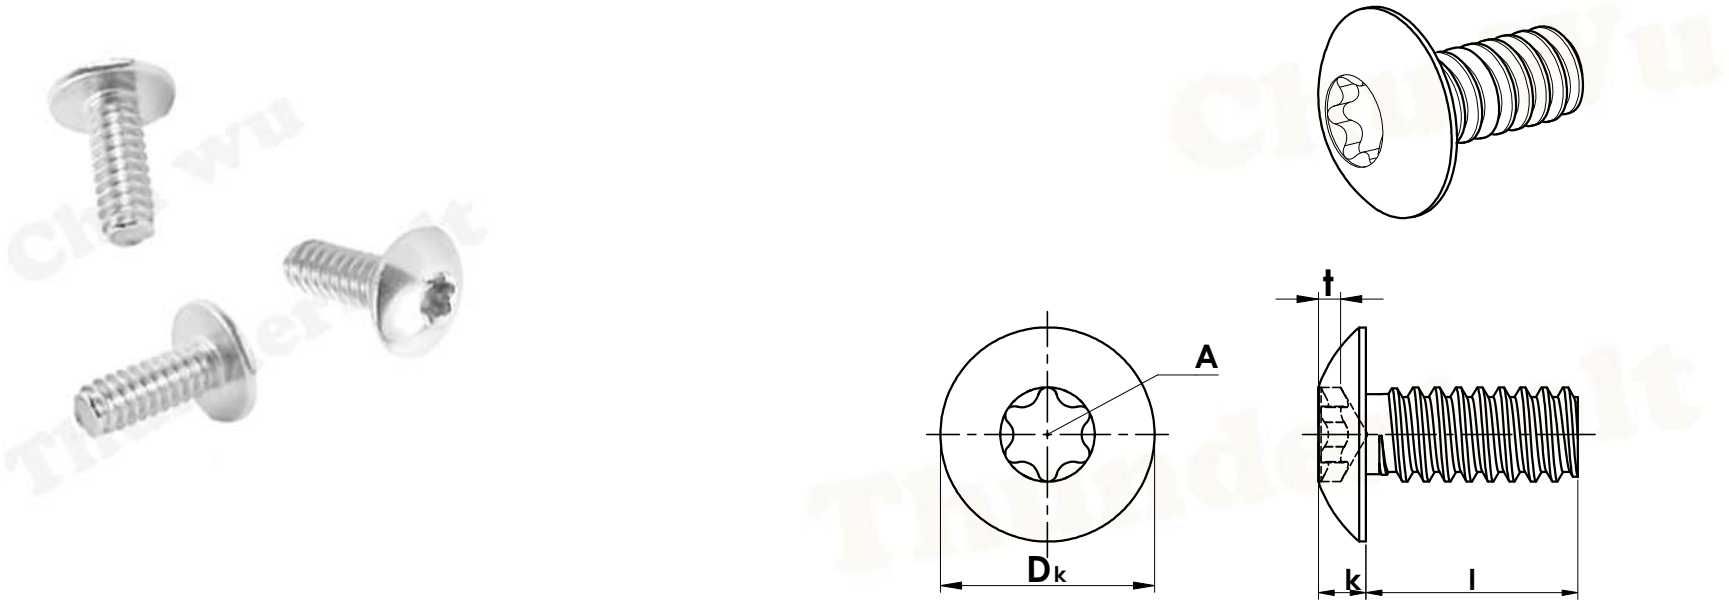

Nom. dia.	Head diameter (D _k) (max.)	Head height (k) (max.)	Recess (A)	Penetration gauging depth (t) (min.)
# 12-24	0.511	0.134	T25	0.070
# 10-32	0.448	0.118	T20	0.055
# 8-32	0.384	0.102	T15	0.045
# 6-32	0.321	0.086	T10	0.045
# 5-40	For more information, please contact our sales staff			
# 4-40				
# 3-48				

Unit: inch